

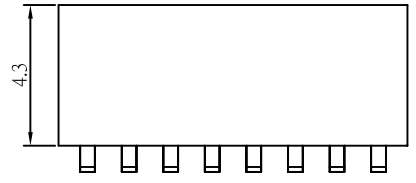


RoHS

版本 REV	变更事项 CHANGE CONTENT	日期 THEREINDER	变更日期 DATE
A0			

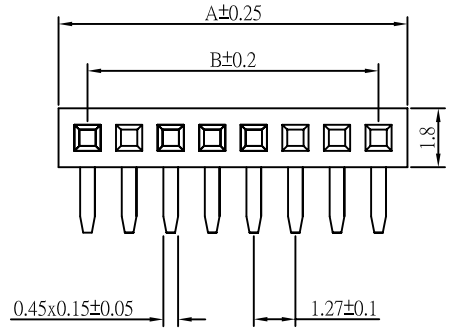


技术要求:  
Technical requirement

一. 电气性能:  
electrical performance  
1-1. 额定电流: 1A AC DC.  
rated current: 1A AC DC.  
1-2. 接触电阻: ≤20mΩ  
Contact resistance: ≤20mΩ  
1-3. 绝缘电阻: ≥1000MΩ  
Insulation resistance: ≥1000MΩ  
1-4. 耐压: 550V AC/Minute  
withstand voltage: 550V AC/Minute

二. 物理特性:  
Physical characteristics  
2-1. 环境温度: -25℃~105℃  
environmental temperature: -25℃~105℃  
2-2. 焊接温度: +260℃, 10s max  
welding temperature: +260℃, 10s max

三. 材质:  
Material  
3-1. 塑胶: PA6T(Black) UL94V-0  
plastic: PA6T(Black) UL94V-0  
3-2. 插针: 磷铜/镀金  
pin: Phosphor/Gold plated

PIN	A	B
1x2A	2.94	1.27
1x3A	4.21	2.54
1x4A	5.48	3.81
1x5A	6.75	5.08
1x6A	8.02	6.35
1x7A	9.29	7.62
1x8A	10.56	8.89
1x9A	11.83	10.16
1x10A	13.10	11.43
1x11A	14.37	12.70
1x12A	15.64	13.97
1x13A	16.91	15.24
1x14A	18.18	16.51
1x15A	19.45	17.78
1x16A	20.72	19.05
1x17A	21.99	20.32
1x18A	23.26	21.59
1x19A	24.53	22.86
1x20A	25.80	24.13
1x21A	27.07	25.40
1x22A	28.34	26.67
1x23A	29.61	27.94
1x24A	30.88	29.21
1x25A	32.15	30.48
1x26A	33.42	31.75
1x27A	34.69	33.02
1x28A	35.96	34.29
1x29A	37.23	35.56
1x30A	38.50	36.83
1x31A	39.77	38.10
1x32A	41.04	39.37
1x33A	42.31	40.64
1x34A	43.58	41.91
1x35A	44.85	43.18
1x36A	46.12	44.45
1x37A	47.39	45.72
1x38A	48.66	46.99
1x39A	49.93	48.26
1x40A	51.20	49.53
1x41A	52.47	50.80
1x42A	53.74	52.07
1x43A	55.01	53.34
1x44A	56.28	54.61
1x45A	57.55	55.88
1x46A	58.82	57.15
1x47A	60.09	58.42
1x48A	61.36	59.69
1x49A	62.63	60.96
1x50A	63.90	62.23

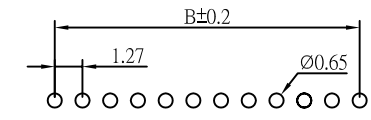

P.C.B LAYOUT

3	包装	<input type="checkbox"/> 袋装 <input checked="" type="checkbox"/> 管装 <input type="checkbox"/> 卷装 <input type="checkbox"/> 盒装	1	PCS
2	塑胶	PH1.27*4.3 1*nP PA6T料 W1.8mm	1	PCS
1	端子	1.27x4.3单侧插短针L6.69mm 磷铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUA'Y	UNIT

	单位 UNIT	mm	泰华电子有限公司 <b>TaiHua Electronics Co., Ltd</b>	
	比例 SCALE			
x ± 0.5	x*±	核准:	版本: A0	产品名称 Production name
.x ± 0.30	.x*±	APPROVED BY	页次: 1/1	产品料号 Product No
.xx ± 0.20	.xx*±	审核:	日期:	客户料号 Client No
.xxx ± 0.005	.xxx*±	CHECKED BY		
		制图: 吕灿东		
		DRAWN BY		